

## High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology

### 1 Description

The iW1798 is a high performance AC/DC power supply controller for Rapid Charge applications that uses transformer communication (XM-Comm) technology to minimize external component count and simplify system design. The iW1798 can support high power applications with power ratings of 45W or up and it can support voltage step requests up to 21V. The device operates in quasi-resonant mode to provide high efficiency and it also provides a number of key built-in protection features. The iW1798 can achieve tight multi-level constant voltage and multi-level constant current regulation without a traditional secondary feedback circuit. It also eliminates the need for loop compensation components while maintaining stability over all operating conditions.

The iW1798 is optimized to work with Dialog's secondary-side controller supporting XM-Comm technology for various rapid charge protocols, such as Qualcomm® Quick Charge™ 2.0 and 3.0 technologies, Huawei Fast Charger Protocol (FCP), and USB Power Delivery (PD), to achieve fast and smooth voltage transitions upon request by mobile devices (MD). When paired with the iW662/3, the iW1798 completely eliminates the optocoupler between primary and secondary side. Using Dialog's proprietary transformer communication technology, XM-Comm, the iW662/3 can communicate with the iW1798 to send output voltage requests, output current limits, output voltage undershoot and over voltage information without any additional external components. The iW1798 paired with the iW662/3 can provide fast dynamic load response in typical AC/DC rapid charge adapter designs.

The iW1798 can provide no-load power consumption for a typical 5V output setting of less than 75mW with ample margin. The no-load power consumption can be reduced to less than 20mW with an optional, external active start-up DFET.

Dialog's innovative proprietary technology ensures that power supplies designed with the iW1798 and iW662/3 can provide various output voltage configurations for QC2.0/QC3.0/FCP/USB PD and other proprietary protocols, with various user-selected output current limit combinations.

Qualcomm® Quick Charge™ 2.0 and 3.0 are products of Qualcomm Technologies, Inc.


### 2 Features

- Supports 45W or up application circuit designs
- Supports 10mV voltage step request up to 21V required by USB PD programmable power supply (PPS) or other proprietary rapid charge protocols
- Integrated XM-Comm technology eliminates secondary-to-primary optocoupler
  - » Transformer communication for all the rapid charge information: output voltage request, output current limit, output voltage undershoot, and over-voltage protection
- RC charging VCC technology enables ultra-low no-load power of < 75mW with ample margin at 230V<sub>AC</sub> and 5V output voltage setting
  - » < 20mW achievable (at 230V<sub>AC</sub>/5V<sub>OUT</sub>) with an external active startup circuit
- High VCC pin voltage rating eliminates external V<sub>VCC</sub> LDO
- Tight multi-level constant-voltage and multi-level constant-current regulation with primary-side feedback and control
- Fast dynamic load response (DLR)
- Proprietary optimized load adaptive maximum constant frequency PWM switching with quasi-resonant operation achieves best size, efficiency, and common mode noise
- Multi-mode PWM/PFM control improves efficiency at various load conditions
- User-configurable 4-level cable drop compensation independent of output voltage
- **EZ-EMI™** design enhances manufacturability
- Built-in single-point fault protections against output short-circuit including soft short and half short, output over-voltage, and output over-current
- Advance fault control technology addresses issues of soft shorts in cables and connectors by effectively reducing the average output power at fault conditions without latch
- Dual over-temperature protection with both internal OTP and external shutdown control
- No audible noise over entire operating range
- Supports rapid charge technologies, such as QC 2.0 and 3.0 technologies, FCP and USB PD

**High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology**

**3 Applications**

- Rapid-charging AC/DC adapters for smart phones, tablets and other portable devices

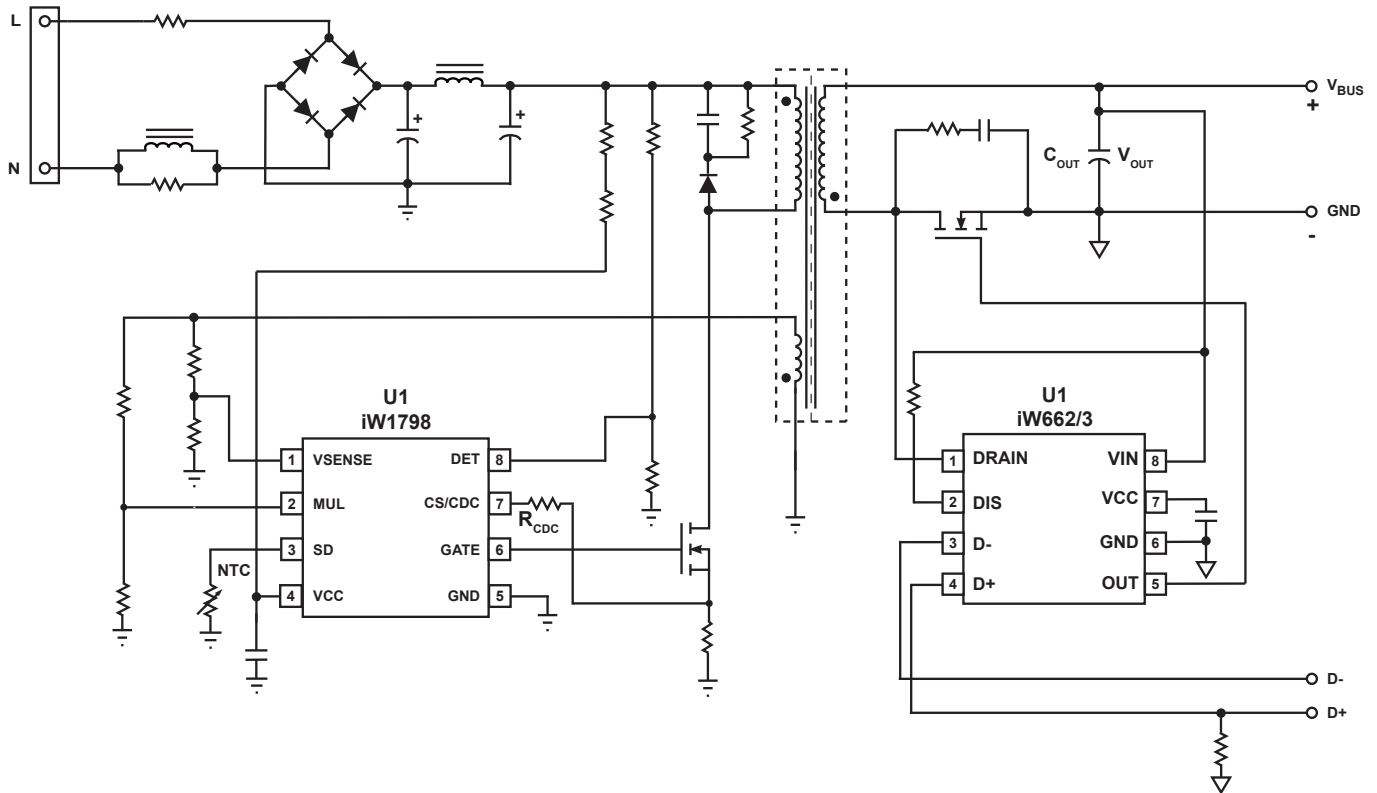

**Figure 3.1 : iW1798 Typical Application Circuit for Multi-Level Output Voltage and Current (Using iW662/3 as Secondary-Side Controller for Rapid Charge Protocols. Achieving < 75mW No-Load Power Consumption in Typical 15W Design.)**

## High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology

### 4 Pinout Description




Figure 4.1 : 8-Lead 8SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	VSENSE	Analog Input	Auxiliary voltage sense. Used for primary-side regulation and secondary-to-primary communication through main transformer
2	MUL	Analog Output	Used for auxiliary winding open detection and/or ASU control.
3	SD	Analog input	Used for external shutdown control. Can be configured for external over-temperature protection (OTP) by connecting an NTC resistor from this pin to Ground.
4	VCC	Power Input	IC power supply.
5	GND	GND	Ground
6	GATE	Output	Gate drive for external MOSFET switch.
7	CS/CDC	Analog Input	Primary-side current sense. Used for cycle-by-cycle peak-current control and limit in primary-side CV/CC regulation. During configuration stage, used for config CDC compensation level.
8	DET	Analog Input	Used for external $V_{VIN}$ OVP protection or X-cap discharge. Note: for external $V_{VIN}$ OVP protection or X-cap discharge, additional components are required on the DET pin.

## High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology

### 5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded. For maximum safe operating conditions, refer to the Electrical Characteristics section.

Parameter	Symbol	Value	Units
DC supply voltage range (pin 1, $I_{VCC} = 20\text{mA max}$ )	$V_{VCC}$	-0.3 to 45.0	V
Continuous DC supply current at VCC pin ( $V_{VCC} = 15\text{V}$ )	$I_{VCC}$	20	mA
VSENSE input (pin 2, $I_{VSENSE} \leq 10\text{mA}$ )		-0.7 to 10.0	V
MUL (pin 2)		-0.7 to 5.0	V
CS/CDC (pin 7)		-0.7 to 5.0	V
GATE (pin 6)		-0.3 to 30	V
SD (pin 3)		-0.7 to 5.5	V
DET (pin 8)		-0.7 to 5.0	V
Maximum junction temperature	$T_{JMAX}$	150	°C
Operating junction temperature	$T_{JOPT}$	-40 to 150	°C
Storage temperature	$T_{STG}$	-65 to 150	°C
Thermal resistance junction-to-ambient	$\theta_{JA}$	160	°C/W
ESD rating per JEDEC JS-001-2017		$\pm 2,000$	V
Latch-up test per JESD78E		$\pm 100$	mA

**Note 1.** Stresses beyond those listed under “Absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology

### 6 Physical Dimensions

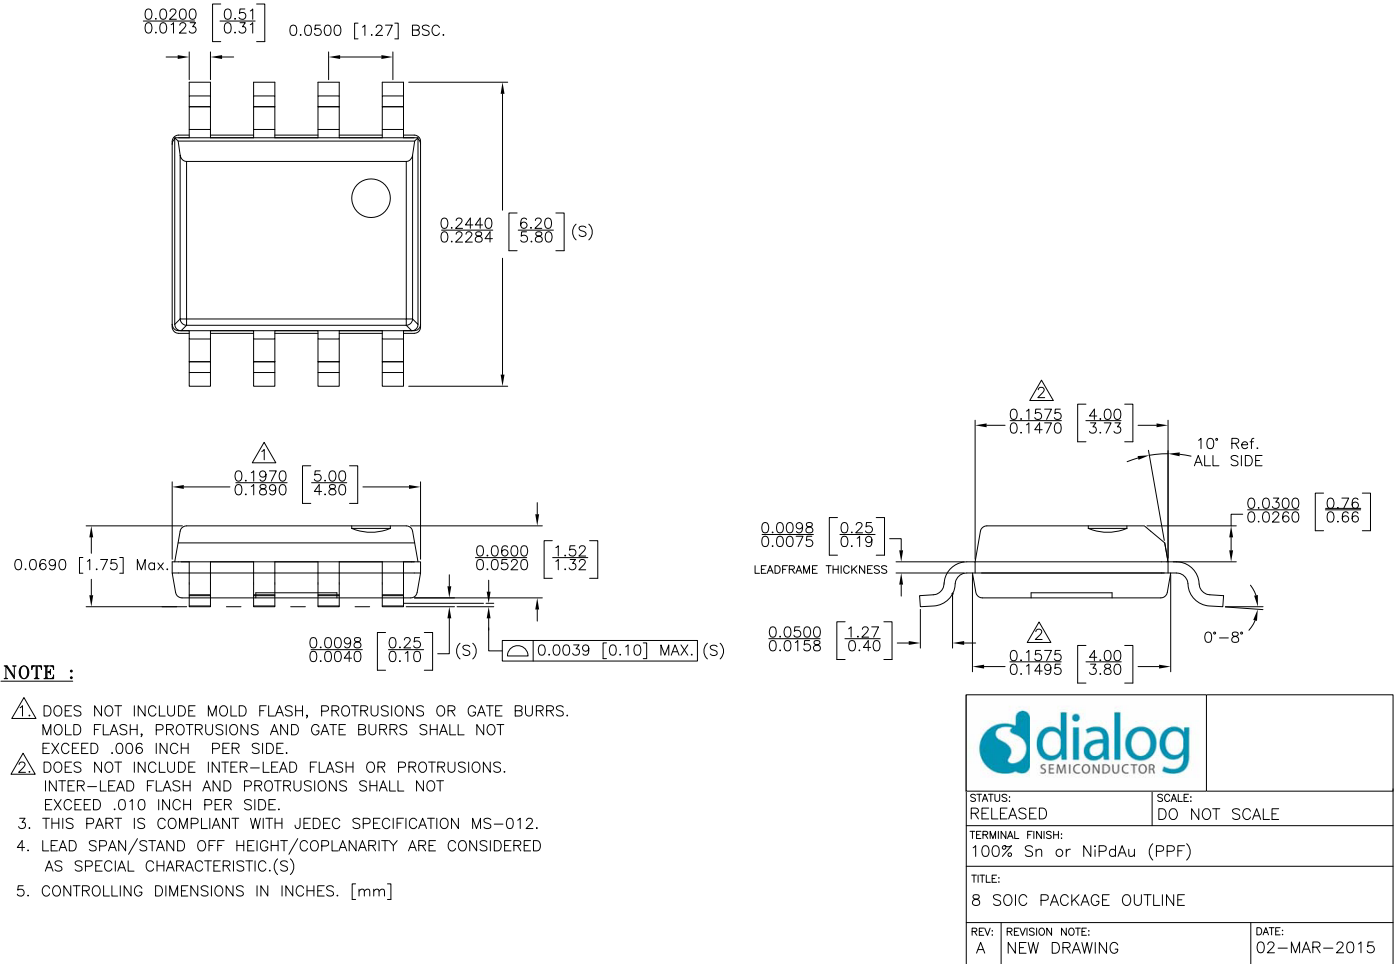


Figure 6.1 : SOIC-8 package outline drawing

### 7 Ordering Information

Part Number	Options							Package	Description
	Protocol Supported	Default $k_{CC}$ at Start-up	CC Shutdown Voltage	OVP/ OTP Latch	CC Shut-down Latch	Supported DLNK Voltage Information Resolution	$V_{VIN}$ OVP or X-cap discharge		
iW1798-38	USB PD/QC	0.5	3.0V	No	No	10mV/Step up to 21V	$V_{VIN}$ OVP	SOIC-8	Tape & Reel <sup>1</sup>

**Note 1:** Tape & Reel packing quantity is 2,500/reel. Minimum packing quantity is 2,500.

## High Performance AC/DC Primary-Side Rapid Charge™ PWM Controller Supporting XM-Comm Technology

### Disclaimer

Unless otherwise agreed in writing, the Dialog Semiconductor products (and any associated software) referred to in this document are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Dialog Semiconductor product (or associated software) can reasonably be expected to result in personal injury, death or severe property or environmental damage. Dialog Semiconductor and its suppliers accept no liability for inclusion and/or use of Dialog Semiconductor products (and any associated software) in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, express or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications. Notwithstanding the foregoing, for any automotive grade version of the device, Dialog Semiconductor reserves the right to change the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications, in accordance with its standard automotive change notification process.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document is subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website ([www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)) unless otherwise stated.

Dialog, Dialog Semiconductor and the Dialog logo are trademarks of Dialog Semiconductor Plc or its subsidiaries. All other product or service names and marks are the property of their respective owners.

© 2019 Dialog Semiconductor. All rights reserved.

### RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

## Contacting Dialog Semiconductor

**United Kingdom (Headquarters)**  
Dialog Semiconductor (UK) LTD  
Phone: +44 1793 757700

**Germany**  
Dialog Semiconductor GmbH  
Phone: +49 7021 805-0

**The Netherlands**  
Dialog Semiconductor B.V.  
Phone: +31 73 640 8822

**Email**  
[info\\_pcbg@diasemi.com](mailto:info_pcbg@diasemi.com)

**North America**  
Dialog Semiconductor Inc.  
Phone: +1 408 845 8500

**Japan**  
Dialog Semiconductor K. K.  
Phone: +81 3 5769 5100

**Taiwan**  
Dialog Semiconductor Taiwan  
Phone: +886 281 786 222

**Web site:**  
[www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)

**Hong Kong**  
Dialog Semiconductor Hong Kong  
Phone: +852 2607 4271

**Korea**  
Dialog Semiconductor Korea  
Phone: +82 2 3469 8200

**China (Shenzhen)**  
Dialog Semiconductor China  
Phone: +86 755 2981 3669

**China (Shanghai)**  
Dialog Semiconductor China  
Phone: +86 21 5424 9058