

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

1 Description

The iW1825 is an **AccuSwitch™** product that integrates a 700V power MOSFET with a high-performance digital AC/DC controller. The product offers a unique light load mode that can be configured with an external resistor to allow the design to be optimized for ultra-low no-load power consumption or fast transient response. It operates in quasi-resonant mode to provide high efficiency at heavy loads and minimizes the external component count while simplifying EMI design and lowering the total bill of material cost.

Dialog's **PrimAccurate™** primary-side sensing technology allows the iW1825 to eliminate the need for secondary-side feedback while achieving excellent line and load regulation. This proprietary digital control technology also eliminates the need for loop compensation components while maintaining stability over all operations. Pulse-by-pulse waveform analysis allows for a loop response that is much faster than traditional solutions, resulting in improved dynamic load response. The built-in power limit function enables optimized transformer design in universal off-line applications and allows for a wide input voltage range.

Dialog's innovative proprietary technology ensures that power supplies built with the iW1825 can achieve both the highest average active efficiency and less than 75mW no-load power consumption. Active start-up circuitry enables fast, yet smooth start-up into large capacitive loads at any output voltage, making it ideal for networking and monitor adaptor applications.

The iW1825 offers a full range of fault protection circuits including internal and external over-voltage protection (OVP). The external OVP feature can monitor either the input voltage or output voltage. The -01 and -31 options offer a supplemental output OVP, while the -10 option can monitor the input voltage, even during start-up, to protect from an over-voltage event on the input.

2 Features

- **AccuSwitch™** technology - integrated 700V power MOSFET
- 25W output power capable
- iW1825-01 and iW1825-31 options: external supplemental output over-voltage protection
- iW1825-10 options: external input over-voltage protection
- Adaptively controlled soft-start enables fast and smooth start-up into large capacitive loads (from 330µF to 6,000µF)
- Internal single-point fault protections against output short-circuit, output over-voltage and output over-current
- User-configurable light-load operation mode for optimized dynamic load response and no-load power consumption
- < 75mW no-load power consumption at 230V_{AC} with fast dynamic load response in typical 12V, 2A 24W compact adapter/charger
- **PrimAccurate™** Primary-side feedback eliminates optocouplers and simplifies design
- Proprietary optimized 79kHz maximum PWM switching frequency with quasi-resonant operation achieves best size, efficiency and common mode noise
- **EZ-EMI™** design enhances manufacturability
- Adaptive multi-mode PWM/PFM control improves efficiency
- User-configurable 5-level cable drop compensation provides design flexibility in iW1825-01 and iW1825-31 options
- Tight constant-voltage and constant current regulation across line and load range
- **SmartDefender™** smart hiccup technology helps to address issues of soft shorts in cables and connectors by effectively reducing the average output power at fault conditions without latch
- Optional on-chip internal over-temperature protection
- No audible noise over entire operating range
- 10-lead SOIC batwing package

3 Applications

- Power adapters for network devices and monitors
- Universal AC/DC adapters (5 – 25W)

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

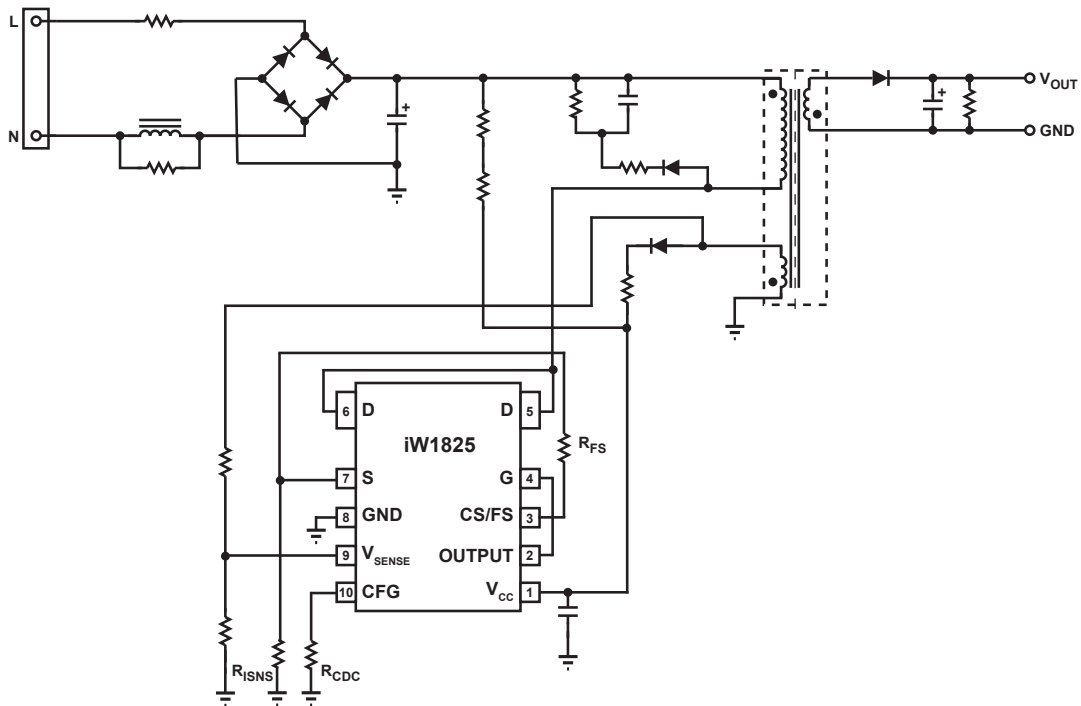


Figure 3.1 : iW1825 Typical Application Circuit
 (Achieving < 75mW No-Load Power Consumption in 12V, 2A 24W Adapter Design).

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

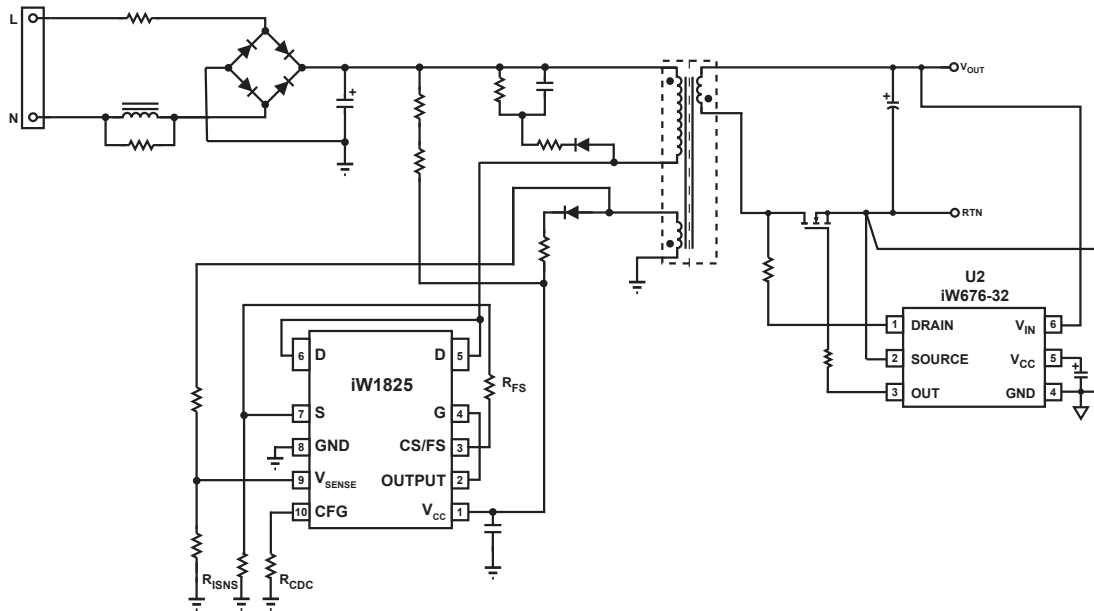


Figure 3.2 : iW1825 Typical Application Circuit with the iW676-32 Synchronous Rectifier Controller with Active Voltage Positioning Technology

WARNING:

The iW1825 is intended for high voltage AC/DC offline applications. Contact with live high voltage offline circuits or improper use of components may cause lethal or life threatening injuries or property damage. Only qualified professionals with safety training and proper precaution should operate with high voltage offline circuits.

iW1825 Output Power Table at Universal Input (85V_{AC}–264V_{AC})

Condition	Open Frame ¹
Output Power (W) ²	25

Notes:

- Note 1. Maximum practical continuous output power measured at open frame ambient temperature of 50°C while minimum bulk capacitor voltage is kept above 90V (test unit is placed in a non-ventilated environment).
- Note 2. The output power can vary depending on the power supply system designs and operating conditions.

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

4 Pinout Description

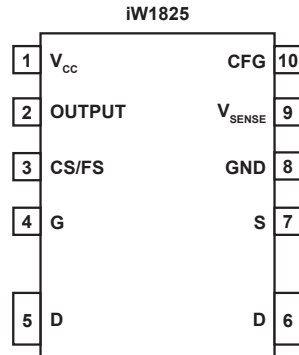


Figure 4.1 : 10-Lead SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	V _{CC}	Power Input	IC power supply.
2	OUTPUT	Output	Gate drive for the MOSFET switch.
3	CS/FS	Analog Input	Primary-side current sense and minimum switching frequency configuration. It is used for cycle-by-cycle peak-current control and limit in primary-side CV/CC regulation. It is also used for minimum switching frequency configuration.
4	G	Analog Input	Gate of internal MOSFET. Connect to OUTPUT pin for proper operation.
5	D	Analog Input	Drain of internal MOSFET.
6	D	Analog Input	Drain of internal MOSFET.
7	S	Analog Input	Source of internal MOSFET.
8	GND	Ground	Ground.
9	V _{SENSE}	Analog Input	Auxiliary voltage sense. It is used for primary-side regulation and detection of secondary-side load transient signal.
10	CFG	Analog Input	In iW1825-01 and iW1825-31 options, it is used for external cable drop compensation (CDC) configuration and supplemental output over-voltage protection (OVP). In the iW1825-10 option, it is dedicated to input OVP.

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

Parameter	Symbol	Value	Units
DC supply voltage range (pin 1, $I_{CC} = 20\text{mA max}$)	V_{CC}	-0.3 to 25.0	V
Continuous DC supply current at V_{CC} pin ($V_{CC} = 15\text{V}$)	I_{CC}	20	mA
OUTPUT (pin 2)		-0.3 to 20.0	V
V_{SENSE} input (pin 9, $I_{VSENSE} \leq 10\text{mA}$)		-0.7 to 4.0	V
CS/FS input (pin 3)		-0.3 to 4.0	V
CFG (pin 10, $I_{CFG} \leq 20\text{mA}$)		-0.8 to 4.0	V
Drain-source voltage	V_{DSS}	700	V
Single Pulse Avalanche Energy (starting $T_J = 25^\circ\text{C}$)	E_{AS}	60	mJ
Maximum junction temperature	T_{JMAX}	150	$^\circ\text{C}$
Operating junction temperature	T_{JOPT}	-40 to 150	$^\circ\text{C}$
Storage temperature	T_{STG}	-65 to 150	$^\circ\text{C}$
ESD rating per JEDEC JS-001-2017		$\pm 2,000$	V
Latch-up test per JESD78E		± 100	mA

Notes:

Note 1. Repetitive rating; pulse width limited by maximum junction temperature.

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

6 Thermal Characteristics


Parameter	Symbol	Value	Units
Thermal Resistance Junction-to-Ambient ¹	θ_{JA}	55.6	°C/W
Thermal Resistance Junction-to-Drain pin (pin 5 and pin 6) ²	ψ_{JB}	31.1	°C/W
Thermal Shutdown Threshold ³	T_{SD}	150	°C
Thermal Shutdown Recovery ³	T_{SD-R}	120	°C

Notes:

- Note 1. Device is mounted on a JEDEC single-sided board with 83mm² of 70μm thick copper, in a one-cubic-foot natural convection chamber with 1W dissipated power.
- Note 2. ψ_{JB} [Psi Junction to Board] provides an estimation of the die junction temperature relative to the PCB [Board] surface temperature. ψ_{JB} is measured at the ground pin (pin 8) without using any thermal adhesives. See Section 10.14 for more information.
- Note 3. These parameters are typical and they are guaranteed by design.

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

7 Physical Dimensions

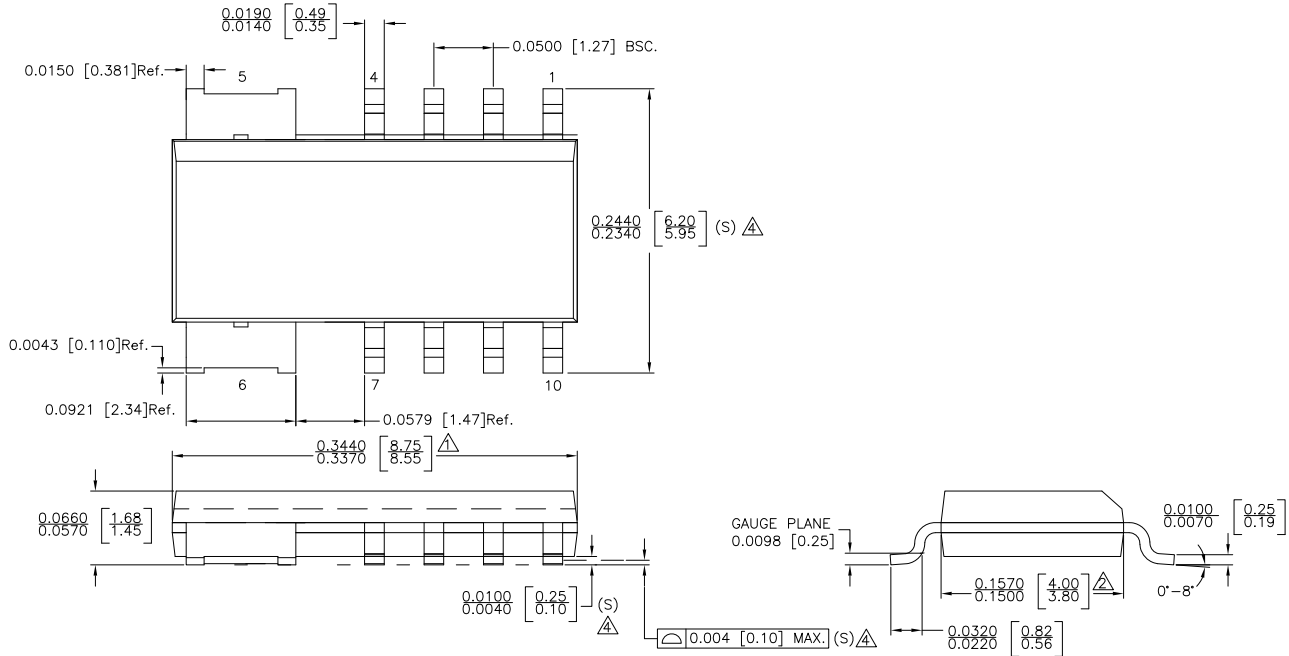

NOTE :

- △ DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .006 INCH PER SIDE.
- △ DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .010 INCH PER SIDE.
- 3. THIS PART IS COMPLIANT WITH JEDEC SPECIFICATION MS-012 AB.
- △ LEAD SPAN/STAND OFF HEIGHT/COPLANARITY ARE CONSIDERED AS SPECIAL CHARACTERISTIC(S)
- 5. CONTROL DIMENSIONS IN INECHES.[mm]

STATUS: RELEASED	SCALE: DO NOT SCALE
TERMINAL FINISH: NiPdAu (PPF)	
TITLE: 10 SOIC BATWING PACKAGE OUTLINE	
REV: A	REVISION NOTE: NEW DRAWING
DATE: 29-SEP-2015	

8 Ordering Information

Part Number	Options ¹					Package	Description
	External CFG Over-Voltage Protection Option	CC Shutdown Voltage at 5V Output ²	Latch Conditions	CDC	Smart Defender		
iW1825-01	Output	No CC Operation	Latch	Yes	No	SOIC-10	Tape & Reel ³
iW1825-31	Output	0.75V	No Latch	Yes	Yes	SOIC-10	Tape & Reel ³
iW1825-10	Input	4V	No Latch	No	Yes	SOIC-10	Tape & Reel ³

Note 1: For availability of additional options, please contact Marketing.

Note 2: Please refer to section 10.5 for CC shutdown voltage at different nominal output voltages.

Note 3: Tape and reel packing quantity is 3,000/reel. Minimum packing quantity is 3,000.

25W AccuSwitch™ AC/DC Controller with Integrated 700V Power FET with Option for Input OVP

Disclaimer

Unless otherwise agreed in writing, the Dialog Semiconductor products (and any associated software) referred to in this document are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Dialog Semiconductor product (or associated software) can reasonably be expected to result in personal injury, death or severe property or environmental damage. Dialog Semiconductor and its suppliers accept no liability for inclusion and/or use of Dialog Semiconductor products (and any associated software) in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, express or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications. Notwithstanding the foregoing, for any automotive grade version of the device, Dialog Semiconductor reserves the right to change the information published in this document, including, without limitation, the specification and the design of the related semiconductor products, software and applications, in accordance with its standard automotive change notification process.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document is subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog, Dialog Semiconductor and the Dialog logo are trademarks of Dialog Semiconductor Plc or its subsidiaries. All other product or service names and marks are the property of their respective owners.

© 2020 Dialog Semiconductor. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany
Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands
Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email
info_pcbg@diasemi.com

North America
Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan
Dialog Semiconductor K. K.
Phone: +81 3 5769 5100

Taiwan
Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:
www.dialog-semiconductor.com

Hong Kong
Dialog Semiconductor Hong Kong
Phone: +852 2607 4271

Korea
Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)
Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)
Dialog Semiconductor China
Phone: +86 21 5424 9058