

Application Note

Smart Lock Motor Driver with Battery Discharge Compensation

AN-CM-298

Abstract

This application note describes the High Voltage GreenPAK IC design configuration as an integrated smart lock motor driver with dynamic overcurrent detection that accommodates varying supply voltages and loads.

The application note comes complete with a design file which can be found in the Reference section.

Smart Lock Motor Driver with Battery Discharge Compensation

Contents

Abstract 1

Contents 2

Figures..... 2

Tables 2

1 Terms and Definitions..... 3

2 References 3

3 Introduction..... 4

4 Construction and Operation Principle 5

 4.1 Operation Principle..... 5

 4.2 HV GreenPAK Design..... 6

 4.3 Application Circuit 8

 4.4 Motor Test 9

5 Design Operation Waveforms..... 11

 5.1 Normal Operation..... 11

 5.2 Stalled Motor at the Start 12

6 Conclusion 13

Revision History 14

Figures

Figure 1: Motor Current Waveform..... 4

Figure 2: Motor Current Waveform with Compensation 4

Figure 3: Design Operations..... 5

Figure 4: HV GreenPAK Design 6

Figure 5: RegFile Data 6

Figure 6: RegFile Usage..... 7

Figure 7: Motor Off Operation 7

Figure 8: Typical Application Circuit 8

Figure 9: Motor Starting Current Waveform, Power Supply 3.6 V 9

Figure 10: Motor No-Load Current, Power Supply 3.6 V 9

Figure 11: Motor Starting Current Waveform, Power Supply 6.0 V 10

Figure 12: Motor No-Load Current, Power Supply 6.0 V 10

Figure 13: No-Load Motor, Power Supply 6.0 V 11

Figure 14: No-Load Motor, Power Supply 3.6 V 11

Figure 15: Loaded Motor, Power Supply 3.0 V 12

Figure 16: Stalled Motor, Power Supply 3.6 V – 6.0 V 12

Tables

Table 1: Motor Parameters..... 9

Smart Lock Motor Driver with Battery Discharge Compensation

1 Terms and Definitions

DC	Direct current
PWM	Pulse width modulation
CMP	Comparator
CCMP	Current comparator
MCU	Microcontroller unit
HV	High voltage
GPO	General purpose output

2 References

For related documents and software, please visit:

<https://www.dialog-semiconductor.com/products/greenpak>

Download our free [GreenPAK Designer software](#) [1] to open the .gp files [2] and view the proposed circuit design. Use the [GreenPAK development tools](#) [3] to freeze the design into your own customized IC in a matter of minutes. Dialog Semiconductor provides a complete library of application notes [4] featuring design examples as well as explanations of features and blocks within the Dialog IC.

- [1] [GreenPAK Designer Software](#), Software Download and User Guide, Dialog Semiconductor
- [2] [AN-CM-298 Smart Lock Motor Driver with Battery Discharge Compensation.gp](#), [GreenPAK Design File](#), Dialog Semiconductor
- [3] [GreenPAK Development Tools](#), [GreenPAK Development Tools Webpage](#), Dialog Semiconductor
- [4] [GreenPAK Application Notes](#), [GreenPAK Application Notes Webpage](#), Dialog Semiconductor

Author: Petro Zhuk

Smart Lock Motor Driver with Battery Discharge Compensation

3 Introduction

Most smart locks use batteries for their power supply, and the battery life is typically 6 months to 1 year. This time depends on the wireless technology used (Wi-Fi, Bluetooth, ZigBee), and how often the door is locked and unlocked. In many cases the motor is powered by four AA batteries, and that is also used in this design example.

Smart lock manufacturers use varying mechanisms for detecting the completion of the deadbolt opening/closing: limit switches, accelerometer fixed on the shaft, hall sensor and magnets fixed on the gear, etc. All these require the associated external components along with the motor driver IC.

One of the deadbolt position detecting schemes is measuring the motor current, and turning off the motor when the deadbolt locks while the motor current increases to a defined threshold, see [Figure 1](#). This method doesn't require special extra components. However, the threshold must be set relative to a specific supply voltage, usually fully charged batteries.

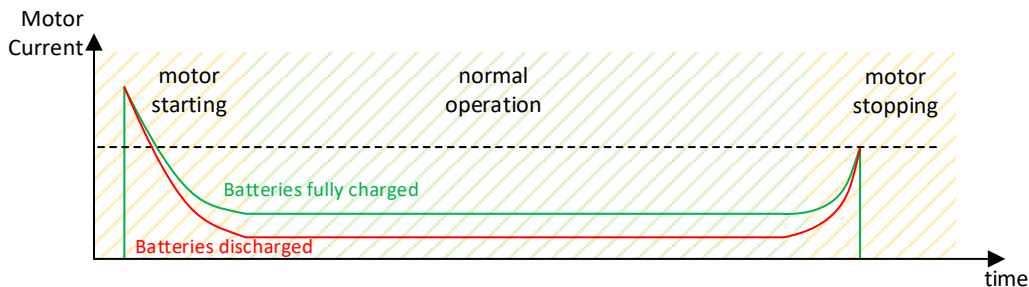


Figure 1: Motor Current Waveform

An improvement to the design is to measure the RMS current per motor and set different current levels to compensate for different battery voltages, see [Figure 2](#). This application note describes how to configure the High Voltage GreenPAK IC for this design approach.

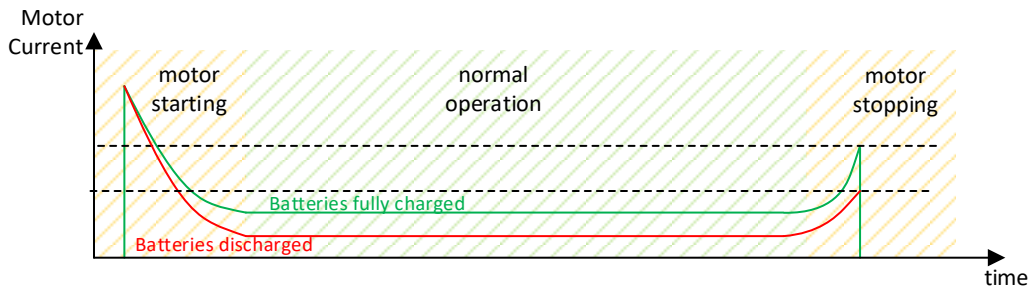


Figure 2: Motor Current Waveform with Compensation

Smart Lock Motor Driver with Battery Discharge Compensation

4 Construction and Operation Principle

4.1 Operation Principle

The behavior of the design can be divided into three sections, see [Figure 3](#):

Motor stall checking: if the motor current is too high after 100 ms of starting the motor, the driver turns off the motor. Also, the motor current is measured at this time.

Current level setting: current CMP Vref is set depending on the motor current (set higher than measured value).

Overcurrent waiting: if the motor current becomes higher than the selected value during this time, then the motor will be turned off.

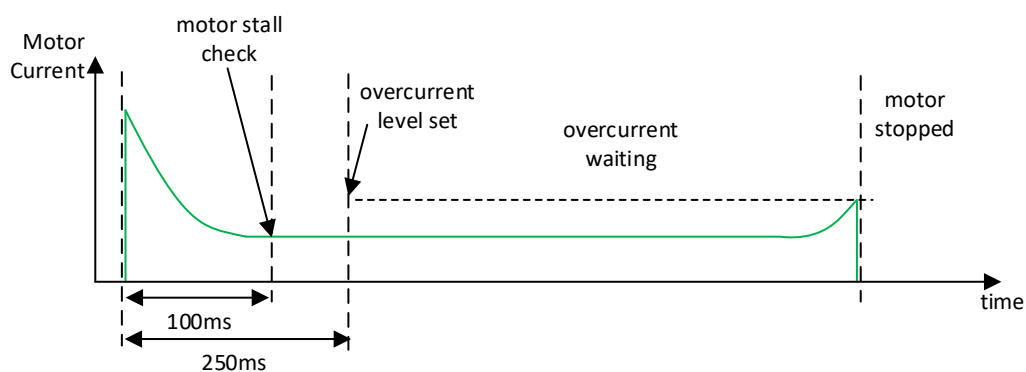


Figure 3: Design Operations

Smart Lock Motor Driver with Battery Discharge Compensation

4.2 HV GreenPAK Design

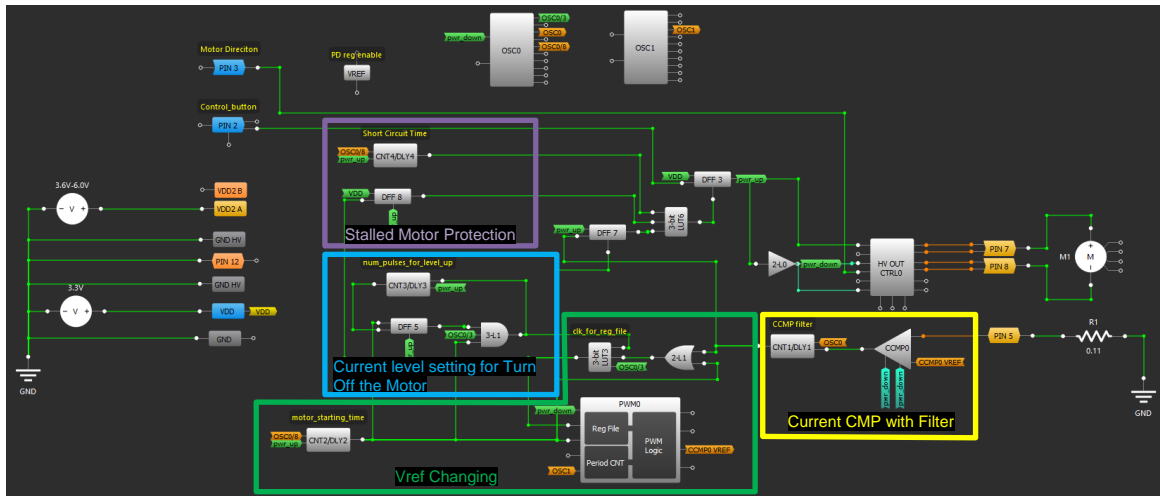


Figure 4: HV GreenPAK Design

RegFile for current CMP is used to measure motor current. There are 16 values, which are switched from higher to lower, see Figure 5.

Byte #	Value	Duty Cycle	Vref
0	0	0.00 %	32 mV
1	4	3.15 %	160 mV
2	8	6.30 %	288 mV
3	12	9.45 %	416 mV
4	16	12.60 %	544 mV
5	20	15.75 %	672 mV
6	21	16.54 %	704 mV
7	22	17.32 %	736 mV
8	23	18.11 %	768 mV
9	24	18.90 %	800 mV
10	25	19.69 %	832 mV
11	27	21.26 %	896 mV
12	29	22.83 %	960 mV
13	31	24.41 %	1024 mV
14	33	25.98 %	1088 mV
15	35	27.56 %	1152 mV

Figure 5: RegFile Data

Smart Lock Motor Driver with Battery Discharge Compensation

After 250 ms the Register File is switched by two values to set a new current level, as shown in Figure 6. When the motor current increases to this new current level, the motor will be turned off, see Figure 7.

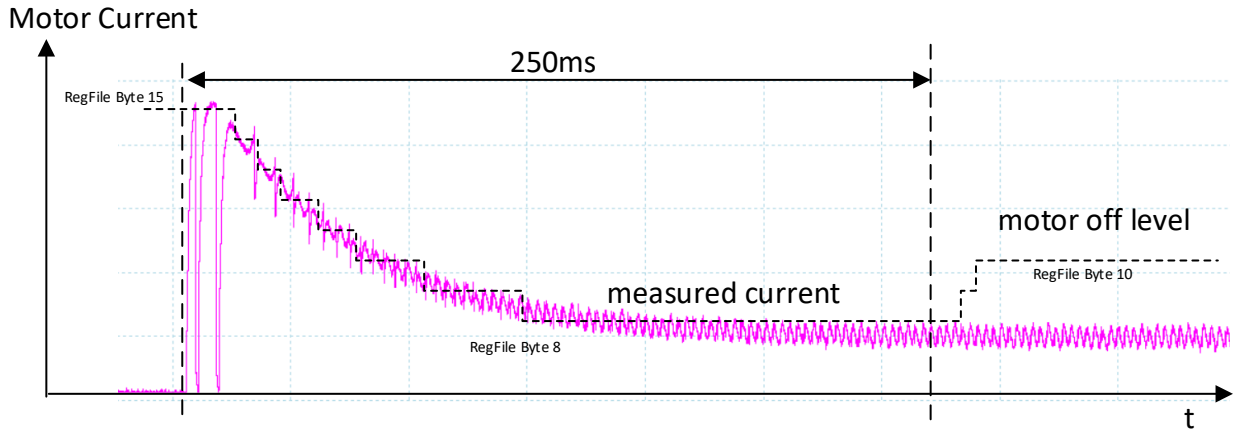


Figure 6: RegFile Usage

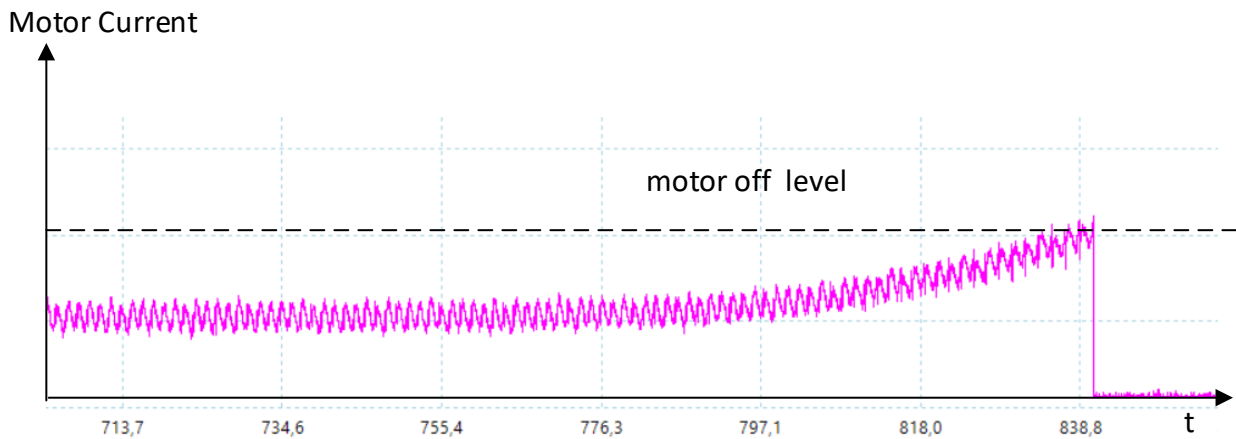


Figure 7: Motor Off Operation

For different power supply voltages and loads the motor current will be different. For higher motor current “motor off level” will become higher.

Smart Lock Motor Driver with Battery Discharge Compensation

4.3 Application Circuit

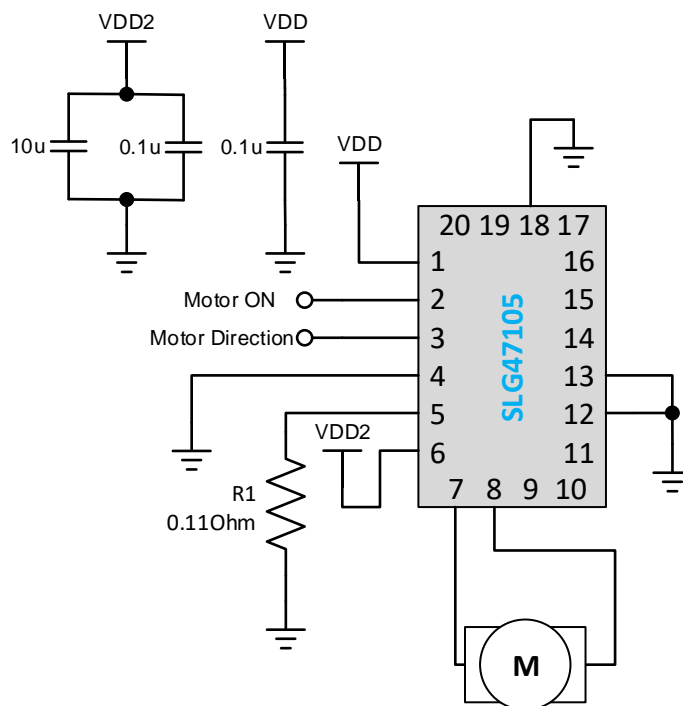


Figure 8: Typical Application Circuit

PIN#2 Motor ON – rising edge turns on the motor.

PIN#3 Motor Direction – motor direction rotation: HIGH – forward rotation, LOW – reverse rotation.

VDD range: 2.3 V – 5.5 V.

VDD2 range: 3.6 V – 6.0 V.

Smart Lock Motor Driver with Battery Discharge Compensation

4.4 Motor Test

Table 1: Motor Parameters

Winding Resistance	Winding Inductance	No-Load RMS Current	
		Power Supply 6.0 V	Power Supply 3.6 V
Ohm	uH	mA	mA
1.6	730	170	130

Motor starting current is about 2 A at power supply 6.0 V, and after 200 mS decreases to the nominal value, which depends on the power supply voltage. See [Figure 9](#) through [Figure 12](#).

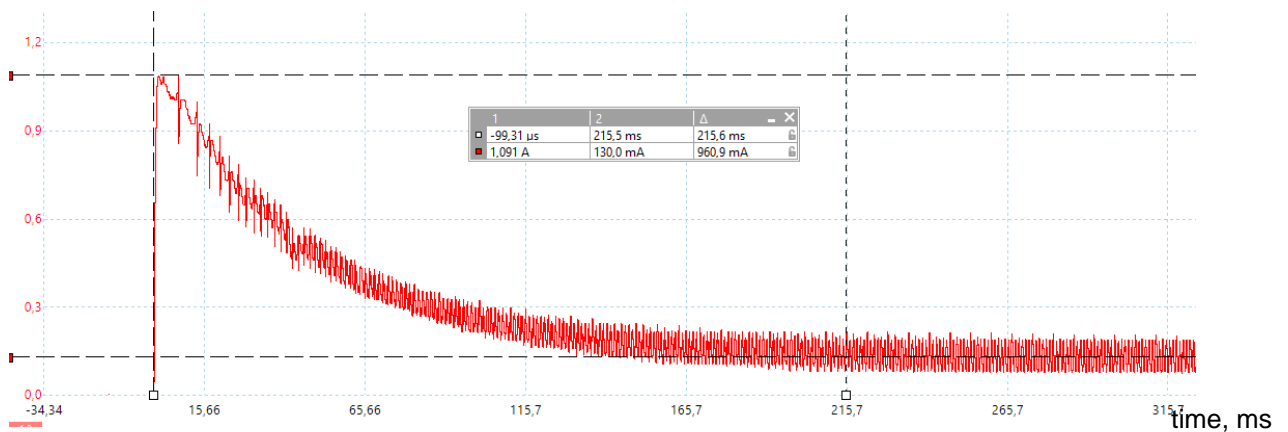


Figure 9: Motor Starting Current Waveform, Power Supply 3.6 V

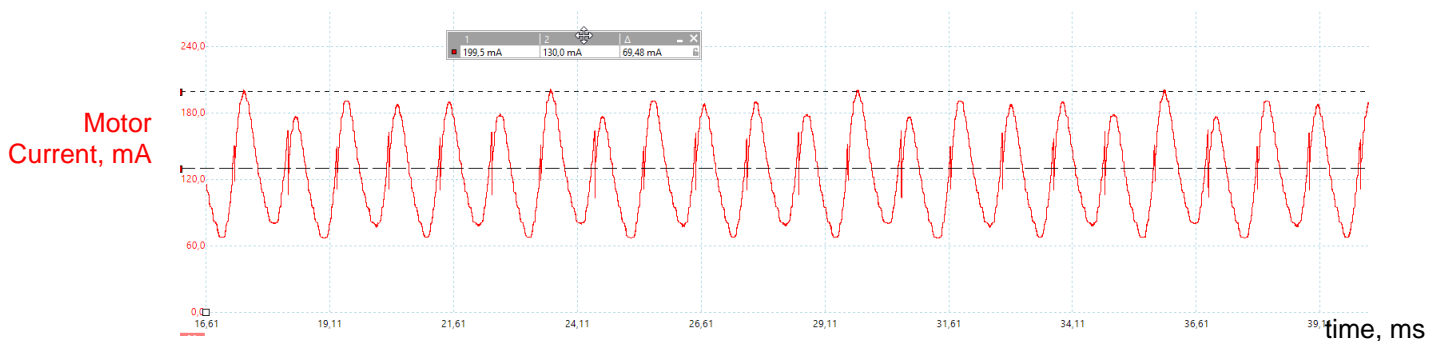


Figure 10: Motor No-Load Current, Power Supply 3.6 V

Smart Lock Motor Driver with Battery Discharge Compensation

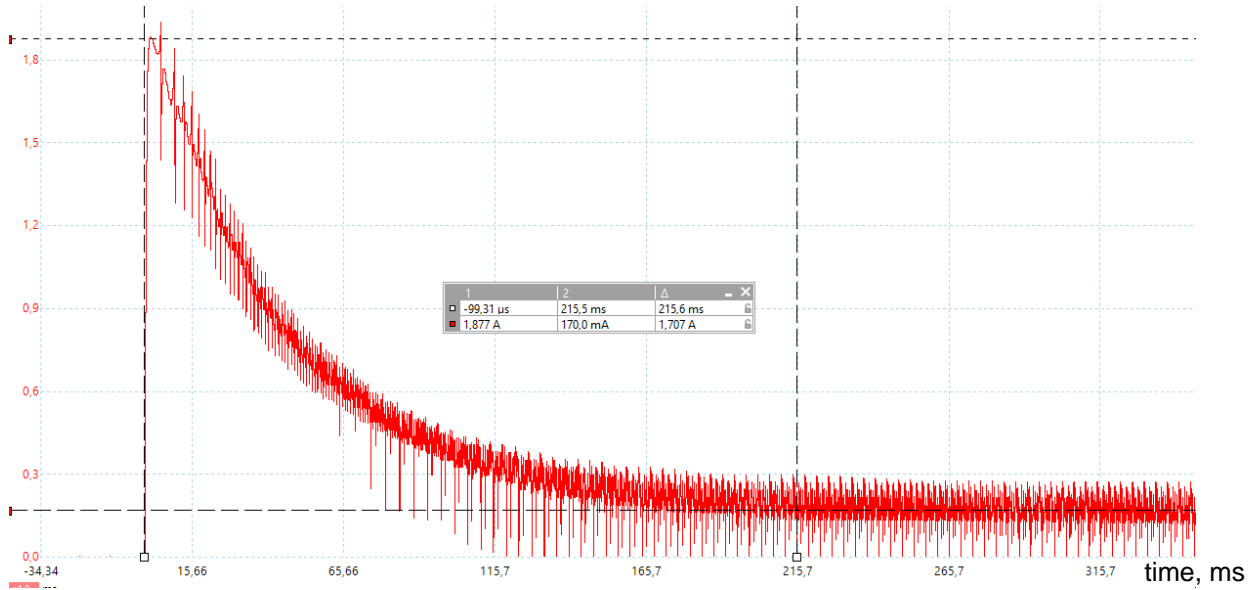


Figure 11: Motor Starting Current Waveform, Power Supply 6.0 V

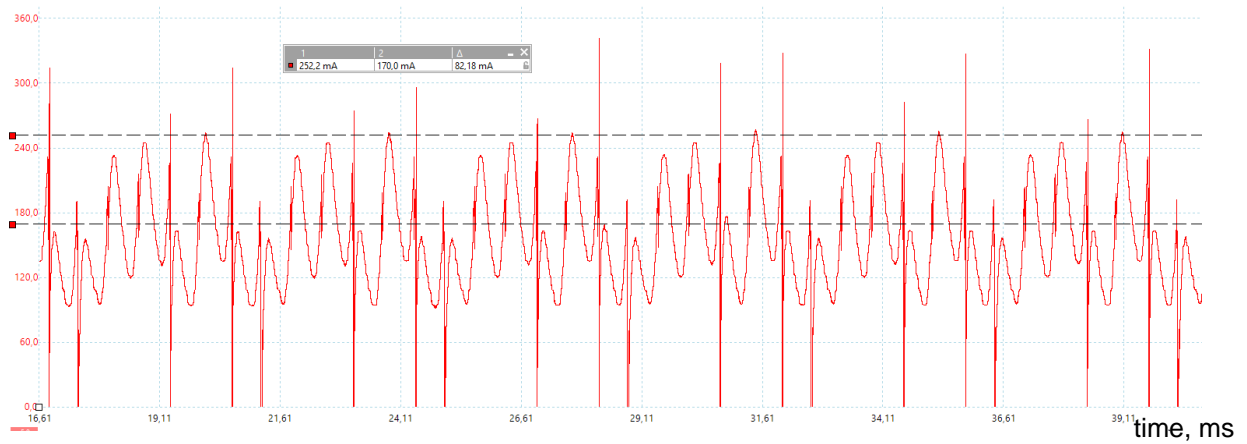


Figure 12: Motor No-Load Current, Power Supply 6.0 V

Smart Lock Motor Driver with Battery Discharge Compensation

5 Design Operation Waveforms

5.1 Normal Operation

Power supply: 6.0 V.

Motor RMS current: 170 mA.

Motor Off current: 620 mA.

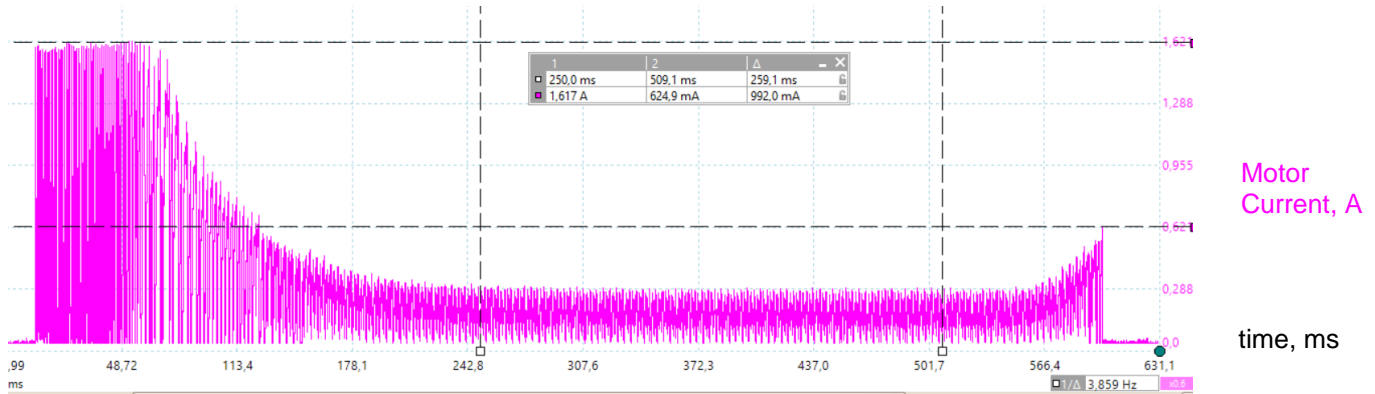


Figure 13: No-Load Motor, Power Supply 6.0 V

Power supply: 3.6 V.

Motor RMS current: 127 mA.

Motor Off current: 460 mA.

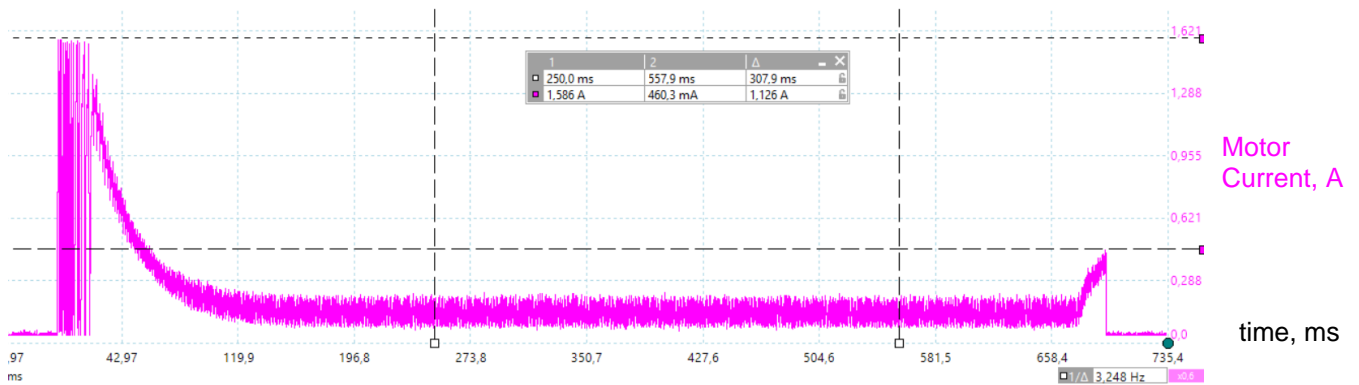


Figure 14: No-Load Motor, Power Supply 3.6 V

Smart Lock Motor Driver with Battery Discharge Compensation

Power supply: 3.0 V.

Motor RMS current: 310 mA.

Motor Off current: 670 mA.

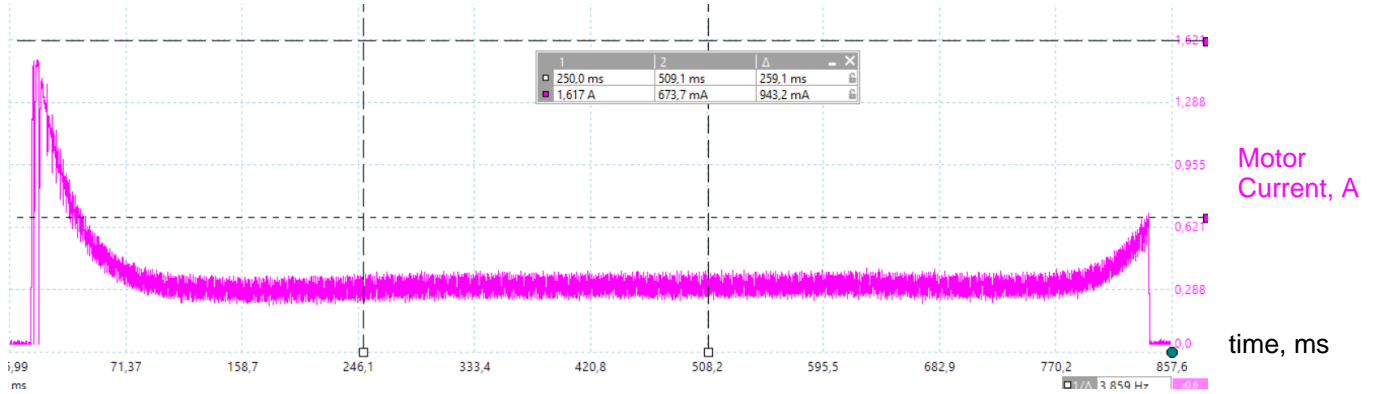


Figure 15: Loaded Motor, Power Supply 3.0 V

5.2 Stalled Motor at the Start

Motor Stall Detection time is 100 ms. If the motor current is high during 100 ms after the start, the motor will be automatically turned off.

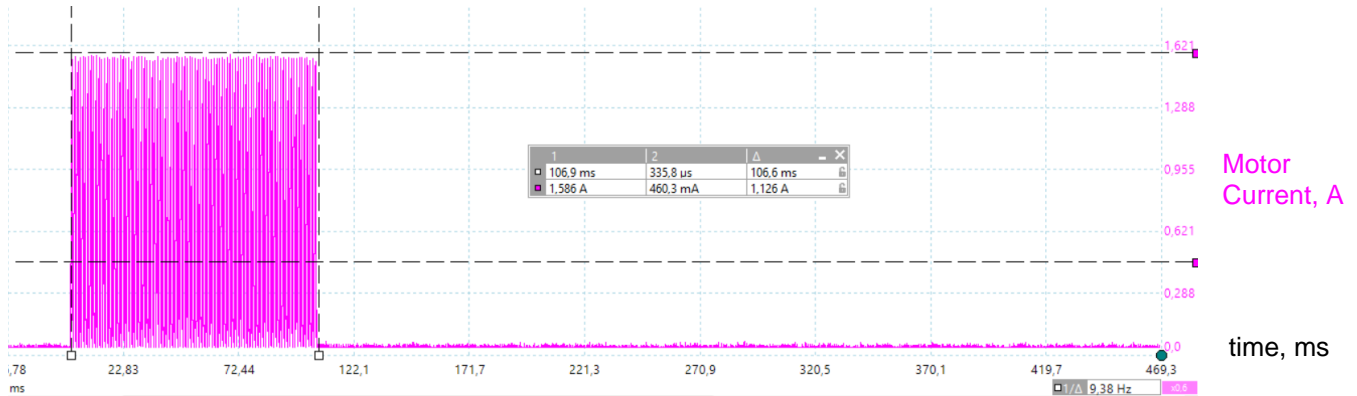


Figure 16: Stalled Motor, Power Supply 3.6 V – 6.0 V

Smart Lock Motor Driver with Battery Discharge Compensation

6 Conclusion

This application note describes one specific example for High Voltage GreenPAK, and how it can be customized for a particular motor and battery set. It is a very flexible and simple solution for motor control using configurable internal logic that supports designer preferences. Integration of the motor driver within GreenPAK means the entire circuit fits within a very small physical space.

The designer can tailor the circuitry for when the motor current or the power supply voltage is changing. GreenPAK also allows design of a constant current and constant voltage motor driver with embedded protection features like Overcurrent, Undervoltage, Overtemperature, etc.

Smart Lock Motor Driver with Battery Discharge Compensation**Revision History**

Revision	Date	Description
1.0	08-Jul-2020	Initial Version

Smart Lock Motor Driver with Battery Discharge Compensation

Status Definitions

Status	Definition
DRAFT	The content of this document is under review and subject to formal approval, which may result in modifications or additions.
APPROVED or unmarked	The content of this document has been approved for publication.

Disclaimer

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© 2021 Dialog Semiconductor. All rights reserved.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
 Phone: +44 1793 757700

Germany

Dialog Semiconductor GmbH
 Phone: +49 7021 805-0

The Netherlands

Dialog Semiconductor B.V.
 Phone: +31 73 640 8822

Email:

enquiry@diasemi.com

North America

Dialog Semiconductor Inc.
 Phone: +1 408 845 8500

Japan

Dialog Semiconductor K. K.
 Phone: +81 3 5769 5100

Taiwan

Dialog Semiconductor Taiwan
 Phone: +886 281 786 222

Web site:

www.dialog-semiconductor.com

Hong Kong

Dialog Semiconductor Hong Kong
 Phone: +852 2607 4271

Korea

Dialog Semiconductor Korea
 Phone: +82 2 3469 8200

China (Shenzhen)

Dialog Semiconductor China
 Phone: +86 755 2981 3669

China (Shanghai)

Dialog Semiconductor China
 Phone: +86 21 5424 9058