

VCC Power Off, Brownout, and Power On with the DataFlash® Family



Introduction

The AT45DBxxxE serial-interface DataFlash memories have simple requirements on the VCC power supply to guarantee normal operation. The VCC supply needs to be below VPOR MIN in order to reset the device and above VPOR MAX to operate correctly.

If the VCC supply drops below VPOR MAX but above VPOR MIN during a brownout condition, then the device may not reset a previous operation.

Product Details

- AT45DB021E VPOR MIN is 1.10V, VPOR MAX is 1.60V
- AT45DB041E VPOR MIN is 1.10V, VPOR MAX is 1.60V
- AT45DB081E VPOR MIN is 1.10V, VPOR MAX is 1.60V
- AT45DB161E VPOR MIN is 1.5V, VPOR MAX is 2.2V
- AT45DB321E VPOR MIN is 1.5V, VPOR MAX is 2.2V
- AT45DB641E VPOR MIN is 1.10V, VPOR MAX is 1.60V

VCC Conditions

Power off

The AT45DBxxxE DataFlash memories are not sensitive to the power off ramp rate. Once the VCC voltage drops below the minimum operating voltage (see individual data sheets for the operating voltage), then normal operation will cease to work correctly.

Brownout

Care must be taken to avoid a VCC drop below the VPOR MAX or minimum operating voltage (see individual data sheets for the operating voltage).

As system complexity continues to increase, voltage regulation is becoming more important. The supply voltage regulator needs to be able to supply the peak current requirement of all of the devices connected. An under specified regulator can cause current starvation. Besides increasing system noise, current starvation during programming or erasing can lead to improper operation and possible data corruption.

Power on

When power is first applied to the device, the device will default to SPI mode 3. In addition, the output pin (SO) will be in a high impedance state, and a high-to-low transition

VCC power off, brownout, and power on


ADAPP001A-DFLASH-5/13

on the CS pin will be required to start a valid instruction. The SPI mode (Mode 3 or Mode 0) will be automatically selected on every falling edge of CS by sampling the inactive clock state.

Bringing the CS pin high will guarantee an idle state, which will put the output pin (SO) in high impedance and draw very low VCC current.

During power-on, the device must not be accessed for at least the minimum t_{VCSL} time (see data sheet for specific timing) after the VCC voltage reaches the minimum operating VCC level. While the device is being powered-on, the internal Power-On Reset (POR) circuitry keeps the device in a reset mode until the supply voltage rises above the POR maximum threshold ($V_{POR\ MAX}$). During this time, all operations are disabled and the device will not respond to any commands. After power-on, the device will be in the standby mode.

If the first operation to the device after power-on will be a program or erase operation, then the operation cannot be started until the supply voltage reaches the minimum VCC level and an internal delay of t_{PUW} (see data sheet for specific timing) has elapsed.

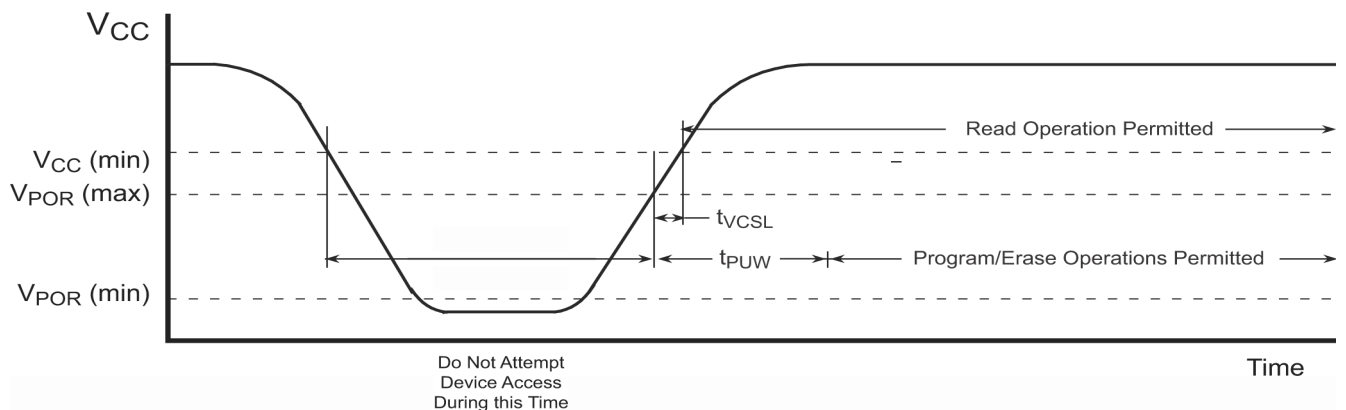

Disclaimer: Adesto Technologies Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Adesto's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Adesto are granted by the Company in connection with the sale of Adesto products, expressly or by implication. Adesto's products are not authorized for use as critical components in life support devices or systems.



Adesto Technologies
Headquarters

3600 Peterson Way
Santa Clara, CA 95054
Phone: (+1) 408.400.0578
Email: contact@adestotech.com
Web: <http://www.adestotech.com>

©2017 Adesto Technologies Corporation. All rights reserved. Adesto, the Adesto Technologies logo, and DataFlash are registered trademarks or trademarks of Adesto Technologies. All other marks are the property of their respective owners



Printed on recycled paper.

ADAPP001A-DFLASH-5/13